

07

04

02


68

01

b Width upper tol.
Width lower tol.

d1 IR upper tol.
IR lower tol.

d2 OR upper tol.
OR lower tol.

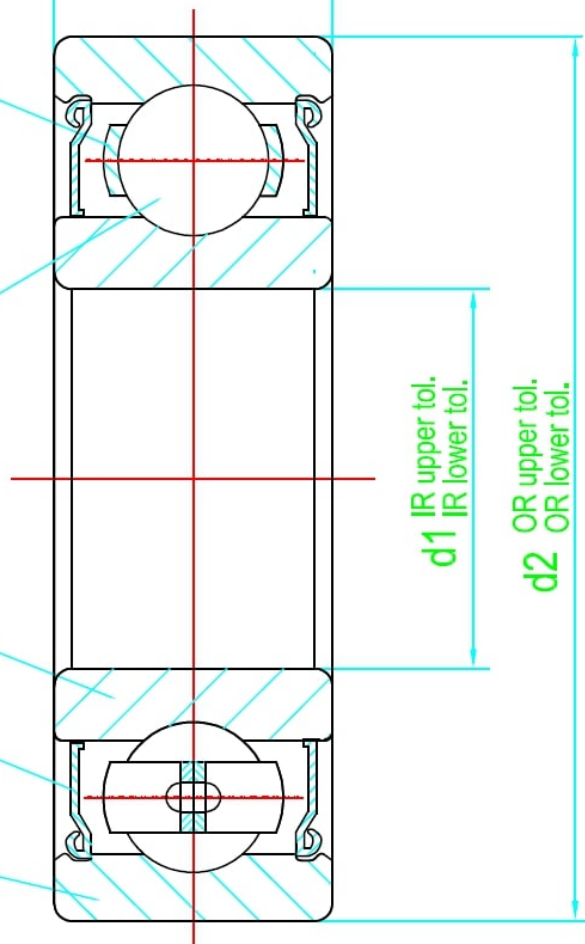

Options and
Applications



REFERENCE No: 1623-2Z

commercial_inch_series

WORKING INFORMATION

Radial Play (mm)	0.003 - 0.018	
Load Rating	C, dyn. N	2670
	C, stat. N	1575
Weight (g)	40	


DIMENSIONS (mm)

d1	15.875(mm) ⁰ -0.008	0.6250(inch)
inch fraction d1		5/8
d2	34.925(mm) ⁰ -0.008	13.0000(inch)
inch fraction d2		1 3/8
b	11.112(mm) ⁰ -0.12	0.4380(inch)
inch fraction b		7/16

INNER DESIGN

Part No.	Name	Material
04	Balls	AISI52100
02	Inner Ring	AISI52100
01	Outer Ring	AISI52100
68	Shields	Steel

ZON™ Bearings are used and trusted across a wide range of market sectors



* The information provided in this technical drawing is subject to our [disclaimer](#)